





VANE ROTARY ACTUATOR

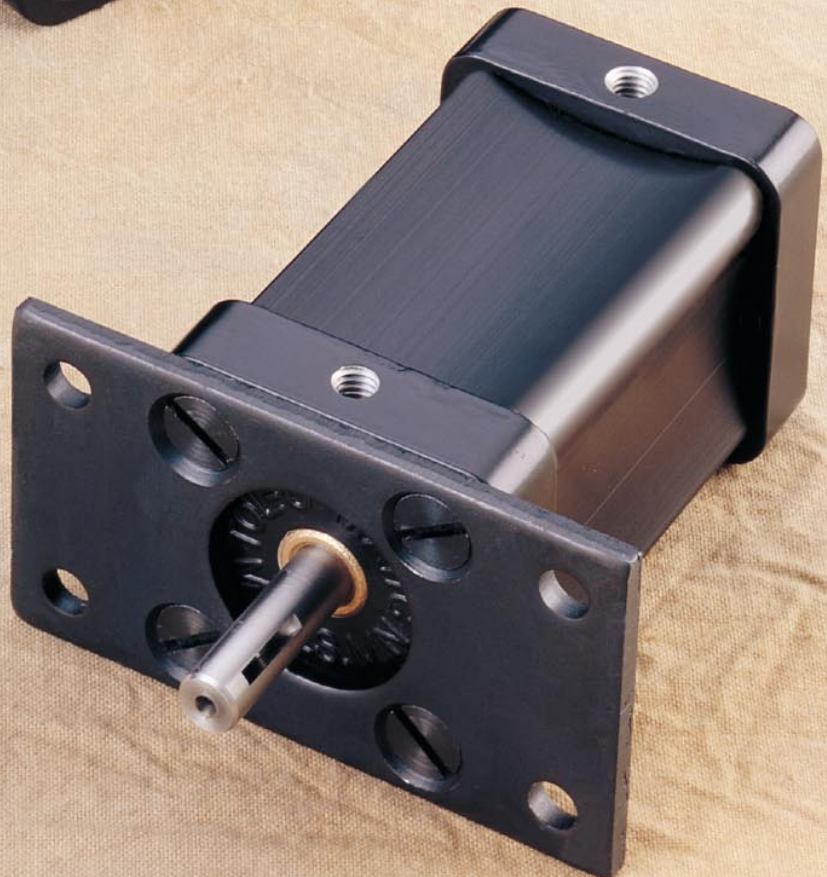

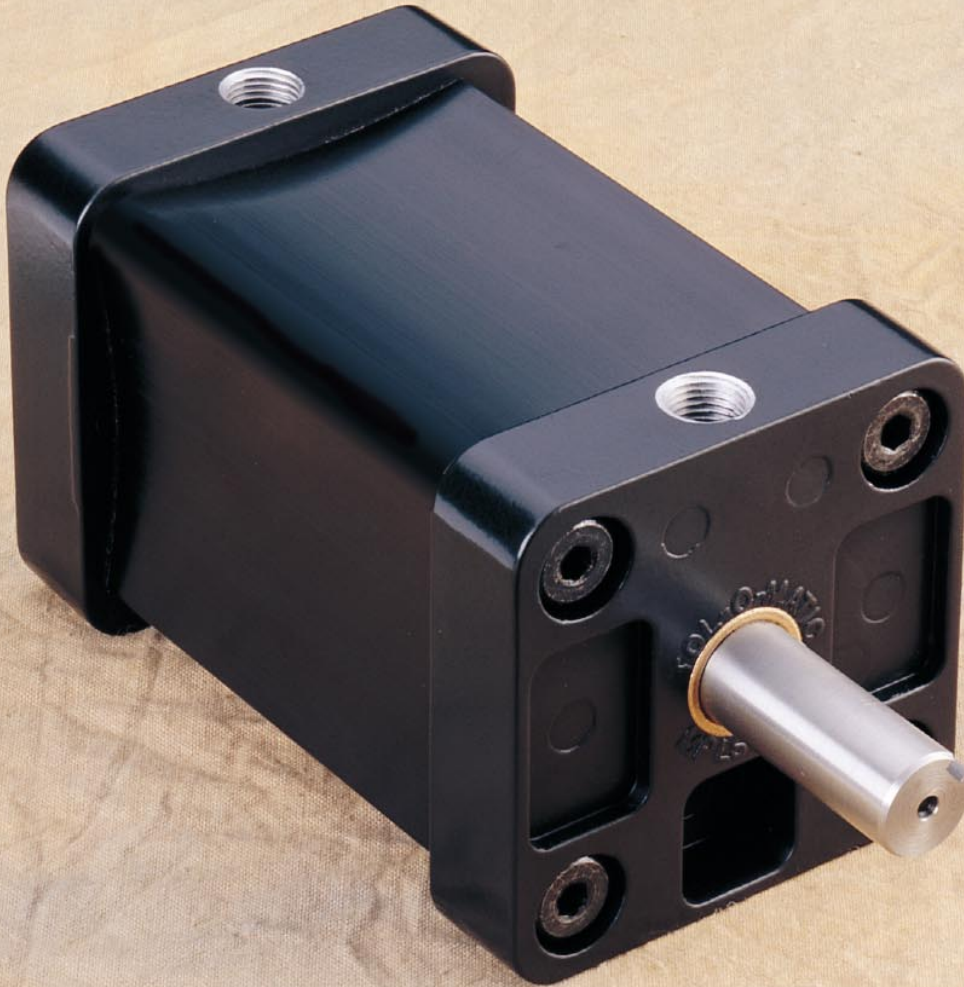

VANE ROTARY ACTUATOR

Tol-O-Matic's pneumatic vane rotary actuator offers an unbeatable combination of high torque, compact design, low breakaway and low price. This actuator family has three series of models: the 1-inch bore 1810 series, the 1¾-inch bore 1817 series and the 2½-inch bore 1825 series. Together they offer a torque range from a few inch-pounds to as high as 325 inch-pounds.

All series are based on a similar design of extruded aluminum housings with integral stators; rotor shafts; Buna-N double-lip vane and stator seal and a unique shaft and end cap design.

The double-lip seal design reduces breakaway by providing a tighter seal, resulting in higher efficiency. The seal design also prevents squeegeeing of lubricant from the circumference of the housing.


The patented* shaft and end cap seal design eliminates the rubber O-ring commonly used to seal the shaft and the end cap. Instead, the shouldering part of the shaft is slightly longer than the housing. When assembled it causes a thin wall of plastic in the end caps to deflect, creating an air-tight seal which shows no wear after millions of cycles. All Tol-O-Matic vane

rotary actuators are permanently pre-lubricated at the factory.

The actuators are available in 100° and 280° rotations, with single or double-ended shafts. All bore sizes can be based-mounted with tapped mounting holes provided. Front mounting is also an option on 1-inch and 1¾-inch bore sizes with front mounting flanges, and on 2½-inch bore sizes with tapped front mounting bolts.

Optional infinitely adjustable stops are available for the 1817 and 1825 Series.

**U.S. Patent No. 4817504*

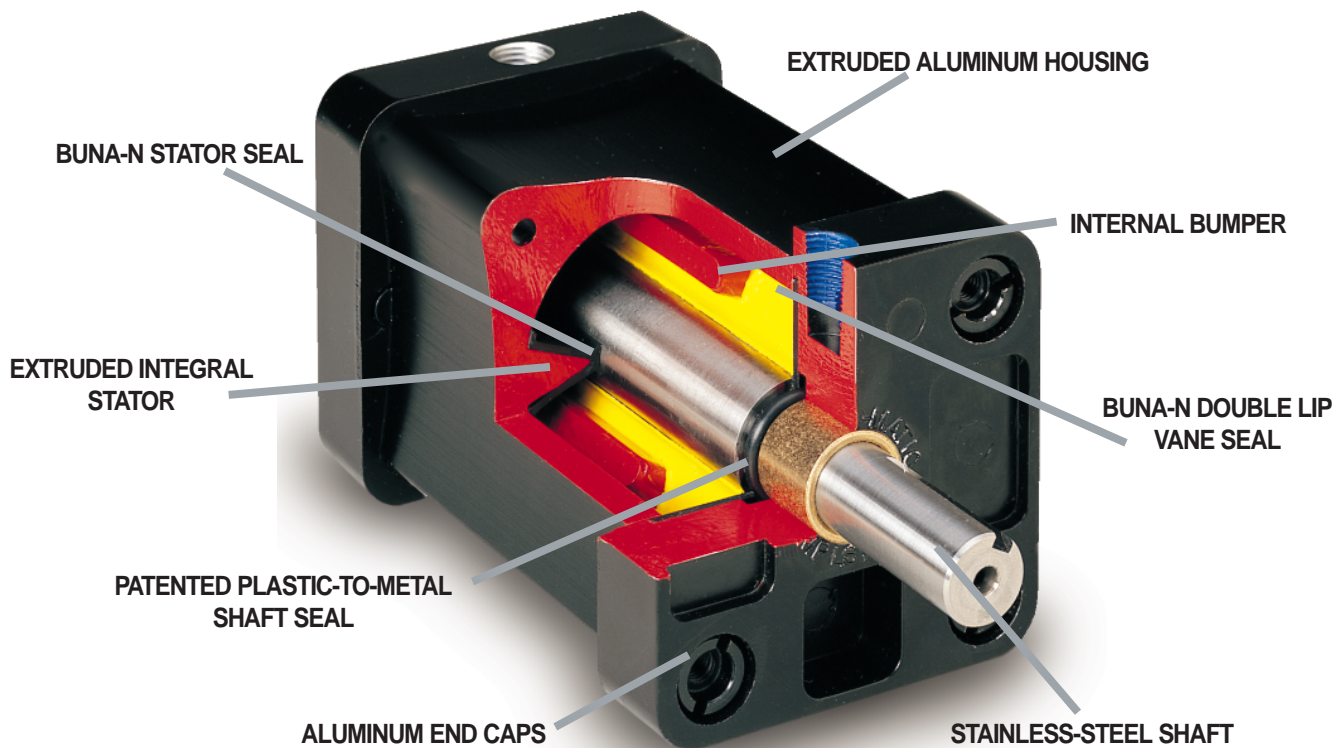

Tol-O-Matic Vane Rotary Actuators Feature:

•Highest Torque •Lowest Breakaway •Compact Design •Lowest Price •Lightest Weight

The graphs on this page are intended for a quick reference to help in determining the Vane Rotary Actuator that will work for your project.



Refer to page 179 in this section to

find step by step directions to size and select the best rotary actuator for the job.

The following pages detail each of the three sizes of the VRA, giving bore


size, weights, force, bearing load capacity, kinetic energy rating, and available options.

VANE ROTARY ACTUATORS - TORQUE vs PRESSURE

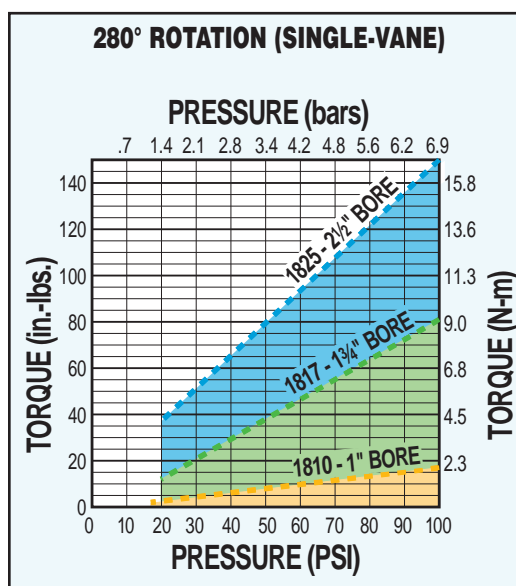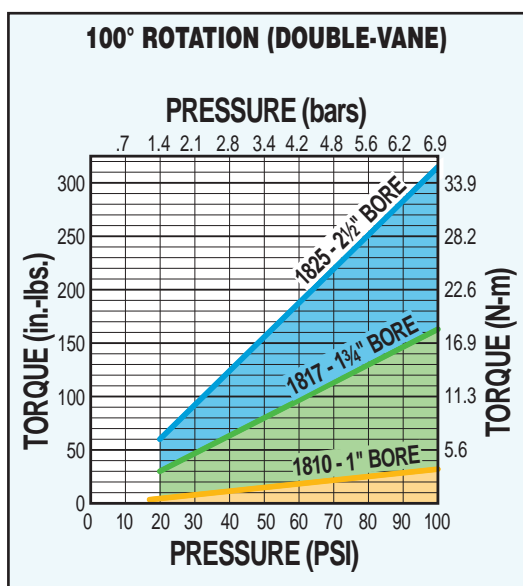

BEARING LOAD CAPACITIES

Model	Radial (lbs.)	Radial (kgs.)	Thrust (lbs.)	Thrust (kgs.)
1810	6.0	2.7	1.0	.45
1817	18	8.2	2.5	1.13
1825	35	15.9	4.0	1.81



KINETIC ENERGY RATINGS

Kinetic Energy Absorption/Stop

Model	KE/Stop (in.-lbs.)	KE/Stop (N-m)
1810	.15	.02
1817	.35	.04
1825	.70	.08

For Assistance Call
1-800-328-2174
(Toll Free U.S. and Canada)
or
763-478-8000
Fax 763-478-8080

1" BORE - 1810 SERIES



AVAILABLE MODELS

STANDARD ACTUATOR	
Assembly Number	Model
1810-0200	Double-Vane, Single Shaft, 100° Rotation
1810-0201	Single-Vane, Single Shaft, 280° Rotation
1810-0202	Double-Vane, Double Shaft, 100° Rotation
1810-0203	Single-Vane, Double Shaft, 280° Rotation


FRONT FLANGE MOUNT ACTUATOR	
Assembly Number	Model
1810-0700	Double-Vane, Single Shaft, 100° Rotation
1810-0701	Single-Vane, Single Shaft, 280° Rotation
1810-0702	Double-Vane, Double Shaft, 100° Rotation
1810-0703	Single-Vane, Double Shaft, 280° Rotation

SPECIFICATIONS

Weight	7 ounces (.20kgs.)
Operating Pressure	100 PSI Pneumatic (6.9 bars)
Maximum Actual Torque	
100° Rotation	32 inch-pounds (3.6 N-m)
280° Rotation	16 inch-pounds (1.8 N-m)
Operating Temperature	0° to 125° F (-18° to 52° C)

PERFORMANCE DATA

TORQUE VS PRESSURE
1810 SERIES
PRESSURE (bars)

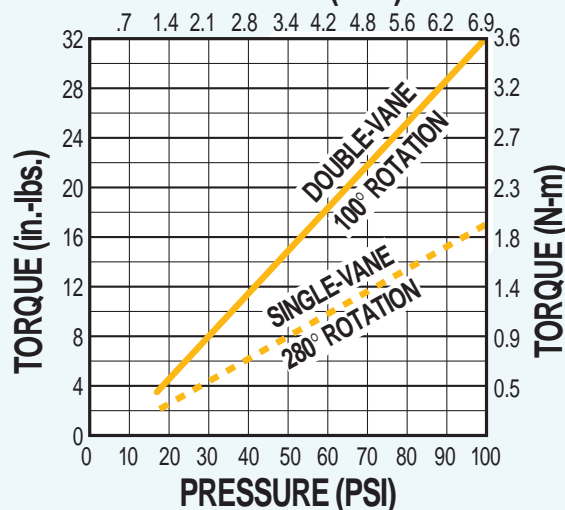

BEARING LOAD CAPACITY



Model	Radial (lbs.)	Radial (kgs.)	Thrust (lbs.)	Thrust (kgs.)
1810	6.0	2.7	1.0	.45

KINETIC ENERGY RATING



Model	KE/Stop (in.-lbs.)	KE/Stop (N-m)
1810	.15	.02

DIMENSIONAL DATA

STANDARD SERIES

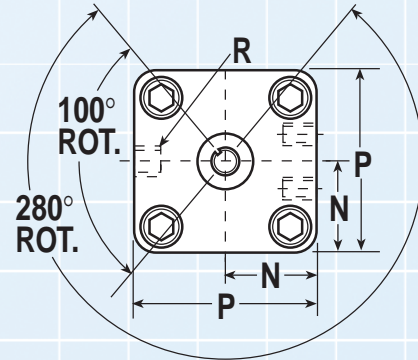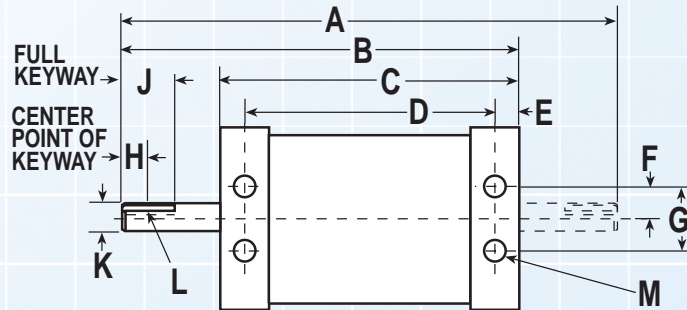

FRONT FLANGE MOUNT

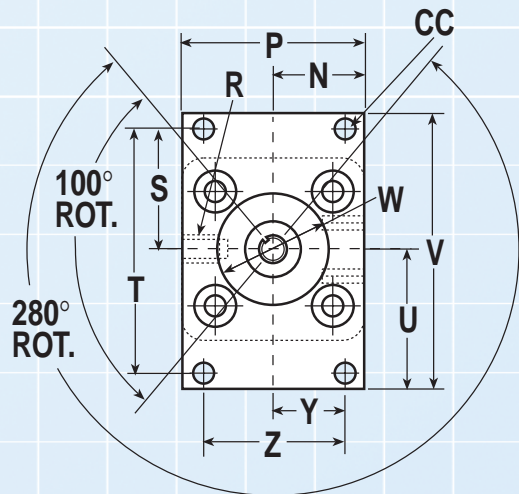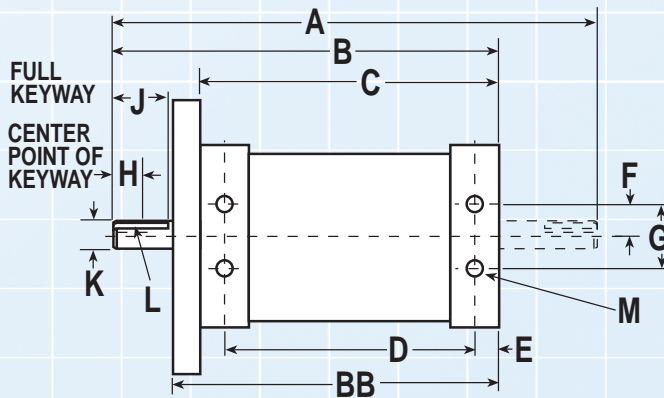

MODEL DIMENSIONS IN INCHES

MODEL	BORE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R
1810	1"	4.23	3.39	2.56	2.14	0.21	0.25	0.50	0.31	0.62	.250	#203 Woodruff	#8-32 x .25	0.75	1.50	10-32 Port

MODEL DIMENSIONS IN INCHES

MODEL	BORE	S	T	U	V	W	X	Y	Z	AA	BB	CC
1810	1"	1.06	2.12	1.31	2.62	0.87	.205	0.50	1.00	-	2.69	.205

MODEL DIMENSIONS IN MILLIMETERS

MODEL	BORE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R
1810	1"	107.4	86.1	65.0	54.4	5.3	6.4	12.7	7.9	15.8	6.4	#203 Woodruff	#8-32 x .25	19.1	38.1	10-32 Port

MODEL DIMENSIONS IN MILLIMETERS

MODEL	BORE	S	T	U	V	W	X	Y	Z	AA	BB	CC
1810	1"	26.9	53.9	33.3	66.6	22.1	5.21	12.7	25.4	-	68.3	5.20

1 3/4" BORE 1817 SERIES



AVAILABLE MODELS

STANDARD ACTUATOR	
Assembly Number	Model
1817-0200	Double-Vane, Single Shaft, 100° Rotation
1817-0201	Single-Vane, Single Shaft, 280° Rotation
1817-0202	Double-Vane, Double Shaft, 100° Rotation
1817-0203	Single-Vane, Double Shaft, 280° Rotation

FRONT FLANGE MOUNT ACTUATOR	
Assembly Number	Model
1817-0700	Double-Vane, Single Shaft, 100° Rotation
1817-0701	Single-Vane, Single Shaft, 280° Rotation
1817-0702	Double-Vane, Double Shaft, 100° Rotation
1817-0703	Single-Vane, Double Shaft, 280° Rotation


1817 SERIES VRA OPTIONS
FRONT MOUNTING FLANGE
ADJUSTABLE STOPS 171

SPECIFICATIONS

Weight	2 Pounds (.9kgs.)
Operating Pressure	100 PSI Pneumatic (6.9bars)
Maximum Actual Torque	
100° Rotation	170 inch-pounds (19.2 N-m)
280° Rotation	85 inch-pounds (9.6 N-m)
Operating Temperature	0° to 125° F (-18° to 52° C)

PERFORMANCE DATA

TORQUE VS PRESSURE
1817 SERIES
PRESSURE (bars)

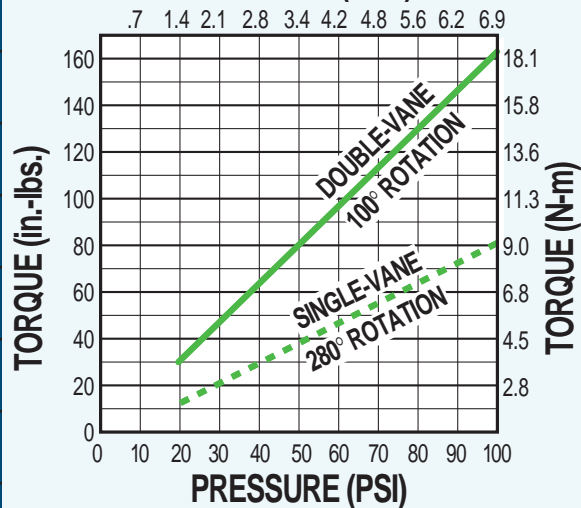

BEARING LOAD CAPACITY



Model	Radial (lbs.)	Radial (kgs.)	Thrust (lbs.)	Thrust (kgs.)
1817	18	8.2	2.5	1.13

KINETIC ENERGY RATING



Model	KE/Stop (in.-lbs.)	KE/Stop (N-m)
1817	.35	.04

DIMENSIONAL DATA

STANDARD SERIES

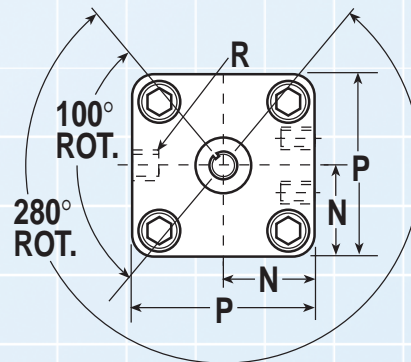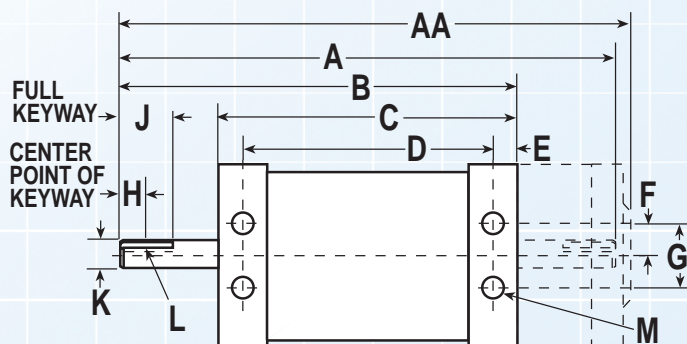

FRONT FLANGE MOUNT

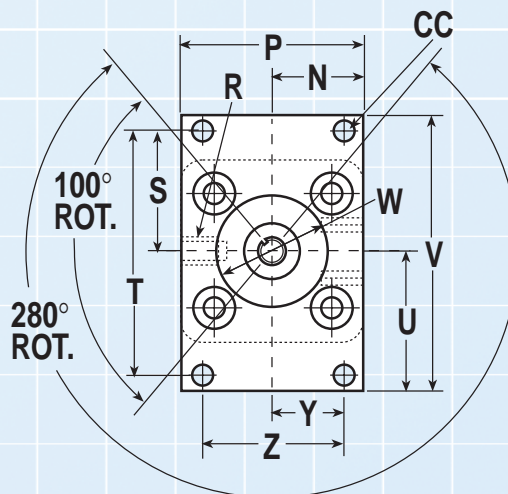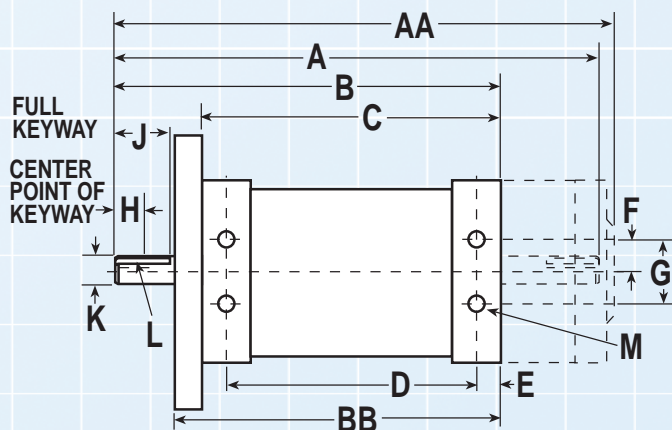

MODEL DIMENSIONS IN INCHES

MODEL	BORE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R
1817	1 ³ / ₄ "	6.50	5.25	4.00	3.37	0.31	0.50	1.00	0.44	0.87	.500	.125 Square Key	#10-32 x .50	1.25	2.50	1/8-27 NPT

MODEL DIMENSIONS IN INCHES

MODEL	BORE	S	T	U	V	W	X	Y	Z	AA	BB	CC
1817	1 ³ / ₄ "	1.50	3.00	1.75	3.50	1.87	.281	1.00	2.00	6.75	4.38	.281

MODEL DIMENSIONS IN MILLIMETERS

MODEL	BORE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R
1817	1 ³ / ₄ "	165.1	133.4	101.6	85.6	7.9	12.7	25.4	11.1	22.1	12.7	.125 Square Key	#10-32 x .50	31.8	63.5	1/8-27 NPT

MODEL DIMENSIONS IN MILLIMETERS

MODEL	BORE	S	T	U	V	W	X	Y	Z	AA	BB	CC
1817	1 ³ / ₄ "	38.1	76.2	44.5	88.9	47.5	7.14	25.4	50.8	171.5	111.3	7.14

2 1/2" BORE 1825 SERIES



AVAILABLE MODELS

STANDARD ACTUATOR	
Assembly Number	Model
1825-0001	Double-Vane, Single Shaft, 100° Rotation
1825-0002	Single-Vane, Single Shaft, 280° Rotation
1825-0003	Double-Vane, Double Shaft, 100° Rotation
1825-0004	Single-Vane, Double Shaft, 280° Rotation

1825 SERIES VRA OPTIONS

ADJUSTABLE STOPS 171

SPECIFICATIONS


Weight	4 pounds, 3 ounces (1.9 kgs.)
Operating Pressure	100 PSI Pneumatic (6.9 bars)
Maximum Actual Torque	
100° Rotation	325 inch-pounds (36.7 N-m)
280° Rotation	145 inch-pounds (16.4 N-m)
Operating Temperature	0° – 125° F (-18° to 52° C)

PERFORMANCE DATA

TORQUE VS PRESSURE

1825 SERIES

PRESSURE (bars)

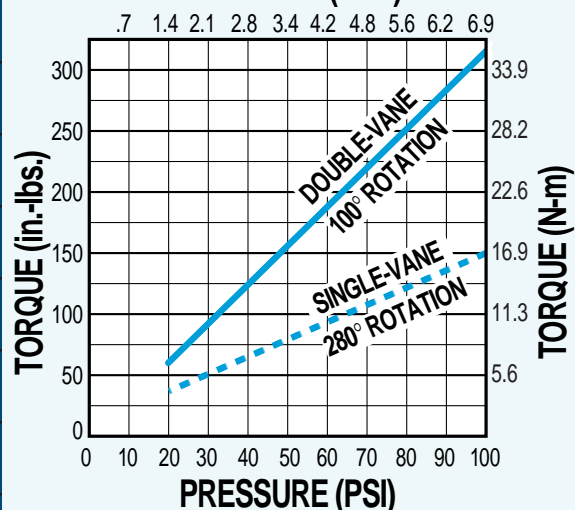


BEARING LOAD CAPACITY

Model	Radial (lbs.)	Radial (kgs.)	Thrust (lbs.)	Thrust (kgs.)
1825	35	15.9	4.0	1.81

KINETIC ENERGY RATING

Model	KE/Stop (in.-lbs.)	KE/Stop (N-m)
1825	.70	.08

DIMENSIONAL DATA

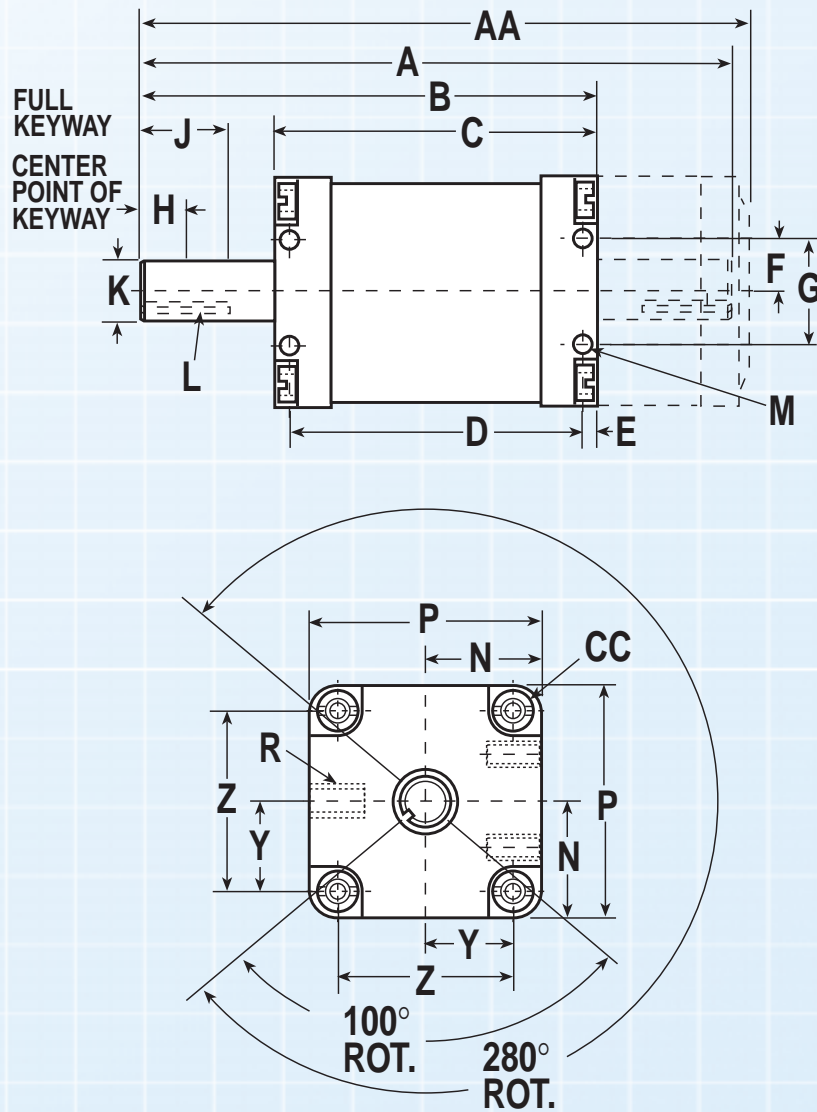

MODEL DIMENSIONS IN INCHES

MODEL	BORE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R
1825	2½"	8.09	6.25	4.45	3.95	0.25	0.75	1.50	0.50	1.00	.750	3/16 Square Key	5/16-18x.62DP	1.50	3.00	1/4-18 x.62 NPT

MODEL DIMENSIONS IN INCHES

MODEL	BORE	S	T	U	V	W	X	Y	Z	AA	BB	CC
1825	2½"	-	-	-	-	-	-	1.218	2.437	8.25	-	1/4-20x.50DP


MODEL DIMENSIONS IN MILLIMETERS

MODEL	BORE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R
1825	2½"	205.5	158.8	113.0	100.3	6.4	19.1	38.1	12.7	25.4	19.1	3/16 Square Key	5/16-18x.62DP	38.1	76.2	1/4-18 x.62 NPT

MODEL DIMENSIONS IN MILLIMETERS

MODEL	BORE	S	T	U	V	W	X	Y	Z	AA	BB	CC
1825	2½"	-	-	-	-	-	-	30.9	61.9	209.6	-	1/4-20x.50DP

FEATURES

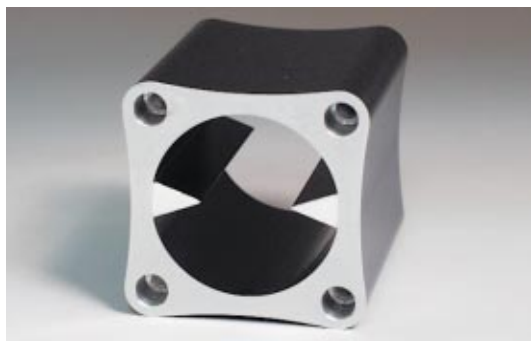

EXTRUDED HOUSING

Black anodized on both the exterior and the internal bore, the housing is made of extruded aluminum with integral stators. Coating the internal bore ensures a smooth finish for lower breakaway and extended seal life. Using integral extruded stators eliminates a major leak path common to most vane rotary actuators.

DOUBLE LIP SEALS

The double-lip rotor seals of Buna-N rubber are molded onto the shaft/vane assembly. This same double-lip concept is used with the stator seal which fits over the integral extruded stators and are held rigidly in place by the end caps. When one lip is pressurized, the other remains relaxed, lowering the breakaway pressure required to move the vane and yet providing an extremely tight seal and improving the actuator's efficiency.




ROTOR SHAFTS

Rotor Shafts are centerless-ground stainless steel. Vanes are made of stamped steel bonded into machined grooves in the rotor shaft. Seals are molded to both the vanes and the rotor shaft ensuring a tight fit. Bumpers are located in the central part of each vane, providing space for air inlet ports. Designed to provide maximum air flow to the vane surface for increased effected area results in lower break-away.

UNIQUE SHAFT SEALING

Instead of the usual abrasive rubber-to-rubber seal, the Tol-O-Matic vane rotary actuator uses a metal-to-plastic seal. The shouldered portion of the polished, stainless steel shaft is .005 inch longer than the extruded housing. When assembled, the shaft causes a thin, highly polished, plastic insert plate housed in the end cap to deflect slightly (0.0025 inch), creating an air-tight seal which has shown no wear after millions of cycles of operation.

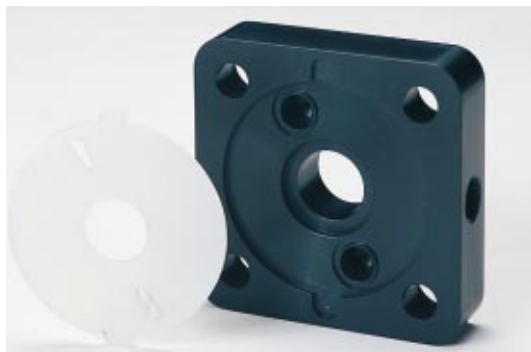

END CAPS

Tol-O-Matic Vane Rotary Actuators have end caps with some unique designs. The air ports have a tear-drop shape which make the most of the triangular-shaped air space created by the bumpers.

End caps for the vane rotary actuators are made of machined aluminum with a plastic insert plate and Oilite® bronze bushings. They are ideal for applications where high strength material is desired.

INFINITELY ADJUSTABLE STOPS



An infinitely adjustable stop mechanism is available for Tol-O-Matic's 1817 and 1825 Series Vane Rotary Actuators. The mechanism allows the user to dial in rotational stops other than the 100° or 280° standard rotations.

The mechanism is available on all 1817 and 1825 Series actuator models with double-ended shafts.

To set the stops, remove the plastic dust cap, loosen the four cap screws and adjust the stops to the desired locations. Then, retighten the cap screws and replace the plastic dust cap.

AVAILABLE MODELS

1817 SERIES (1¾" BORE)	
Assembly Number	Model
1817-0206	Double-Vane, 100° Rotation
1817-0207	Single-Vane, 280° Rotation
1817-0706	Double-Vane, 100° Rotation - Front Flange Mount
1817-0707	Single-Vane, 280° Rotation - Front Flange Mount

1825 SERIES (2½" BORE)	
Assembly Number	Model
1825-0007	Double-Vane, 100° Rotation
1825-0008	Single-Vane, 280° Rotation